



CHANGE NO.	CHANGE CONTENTS	REV.	NAME/DATE

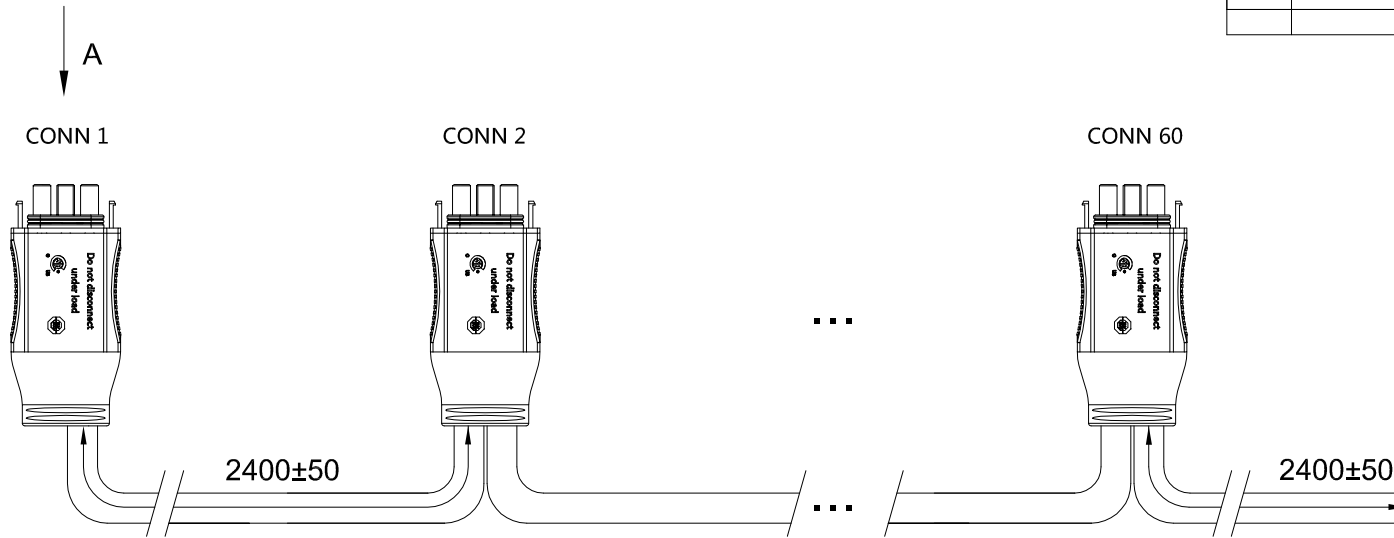

VIEW A



WIRE RUN LIST		
AWG	COLOR	CONN1~CONN60
10	BLACK	L1
	RED	L2
	GREEN	PE

NOTE:

- CABLE: E489601 (UL) TYPE TC-ER 3C/10AWG 90 °C WET OR DRY 600V
--- c(UL) TYPE CIC 90 °C 600V FT1 XLPE 3C/10AWG FT4 DIR BUR SUN RES COLD BEND HWATEK CE
- WATERPROOF RATING: IP67
- A SERIES OF BUS CABLE CONTAINS 60 CONNECTORS, EACH CONNECTOR SPACING IS 2400mm
- WIRING: BLACK-L1, RED-L2, GREEN-PE
- ELECTRICAL PARAMETERS:
WORKING VOLTAGE RATING: 300V
WORKING CURRENT RATING CABLE 30A
RESISTANCE VOLTAGE: AC 2500V 50mA 1 Minute
CONDUCTOR RESISTANCE: 10Ω/km
- USE BLANK CARTONS FOR PACKAGING

TOLERANCES UNLESS OTHERWISE SPECIFIED >0-100 ±5 >2500-3500 ±45 >100-500 ±10 >3500-4500 ±50 >500-900 ±15 >4500-5500 ±65 >900-1300 ±25 >5500-6500 ±80 >1300-1800 ±30 >6500-8000 ±90 >1800-2500 ±35 >8000-10000 ±100		MATERIAL						
DWN. FANTING 2021-09-24		UNIT	mm					
CHK. TIANXING 2021-09-24		SHEET	--	OF	--		REV.	0.1
DRAWING NO. DS3D-03-03-02								